



SPECIFICATIONS

Items	Unit	GTJZ06HD	GTJZ06HD-1	GTJZ08HD	GTJZ10HD	GTJZ12HD	GTJZ14HD
Platform capacity	Kg	230	450	450	320	320	227
Extendable platform capacity	Kg	113	113	113	113	113	113
Max. working height (H2)	m	7.8	8	10	12	14	15.7
Max. platform height (H1)	m	5.8	6	8	10	12	13.7
Length(L)	mm	1860	2480	2480	2480	2480	2840
Width(W)	mm	760	1150	1150	1150	1150	1390
Height (guardrail up)	mm	2180	2210	2340	2470	2580	2590
Height (guardrail down)	mm	1840	1610	1740	1870	2050	2050
Size of platform	mm	1670*740	2270*1120	2270*1120	2270*1120	2270*1120	2640*1120
Extendable platform	mm	900	900	900	900	900	900
Min. Ground clearance (scissor folded)	mm	83	100	100	100	100	100
Wheel base	mm	1360	1870	1870	1870	1870	2220
Min. Turning radius (inner wheels)	mm	0	0	0	0	0	0
Min. Turning radius (outer wheels)	mm	1640	2200	2200	2200	2200	2700
Lifting motor	V/Kw	24/2	24/3	24/3	24/3	24/4.5	24/4.5
Travel speed (folded)	Km/h	4.5	4	4	4	3.5	3.5
Travel speed (raised)	Km/h	0.8	0.8	0.8	0.8	0.8	0.8
Rising/decline speed	Mm/sec	84/38	84/38	84/38	84/38	84/38	88/60
Battery	V/Ah	4x6/210	4*6/210	4*6/210	4*6/210	4*12/300	4*12/300
Charger	V/A	24/25	24/25	24/25	24/25	24/30	24/25
Grade ability	%	25	25	25	25	25	25
Max. working inclination	°	2 - 3	2 - 3	2 - 3	2 - 3	2 - 3	2 - 3
Overall weight	Kg	1415	1850	2180	2500	2850	3280



Non-marking Tyre




Maintenance Support



Emergency Stop



自动坑洞保护系统

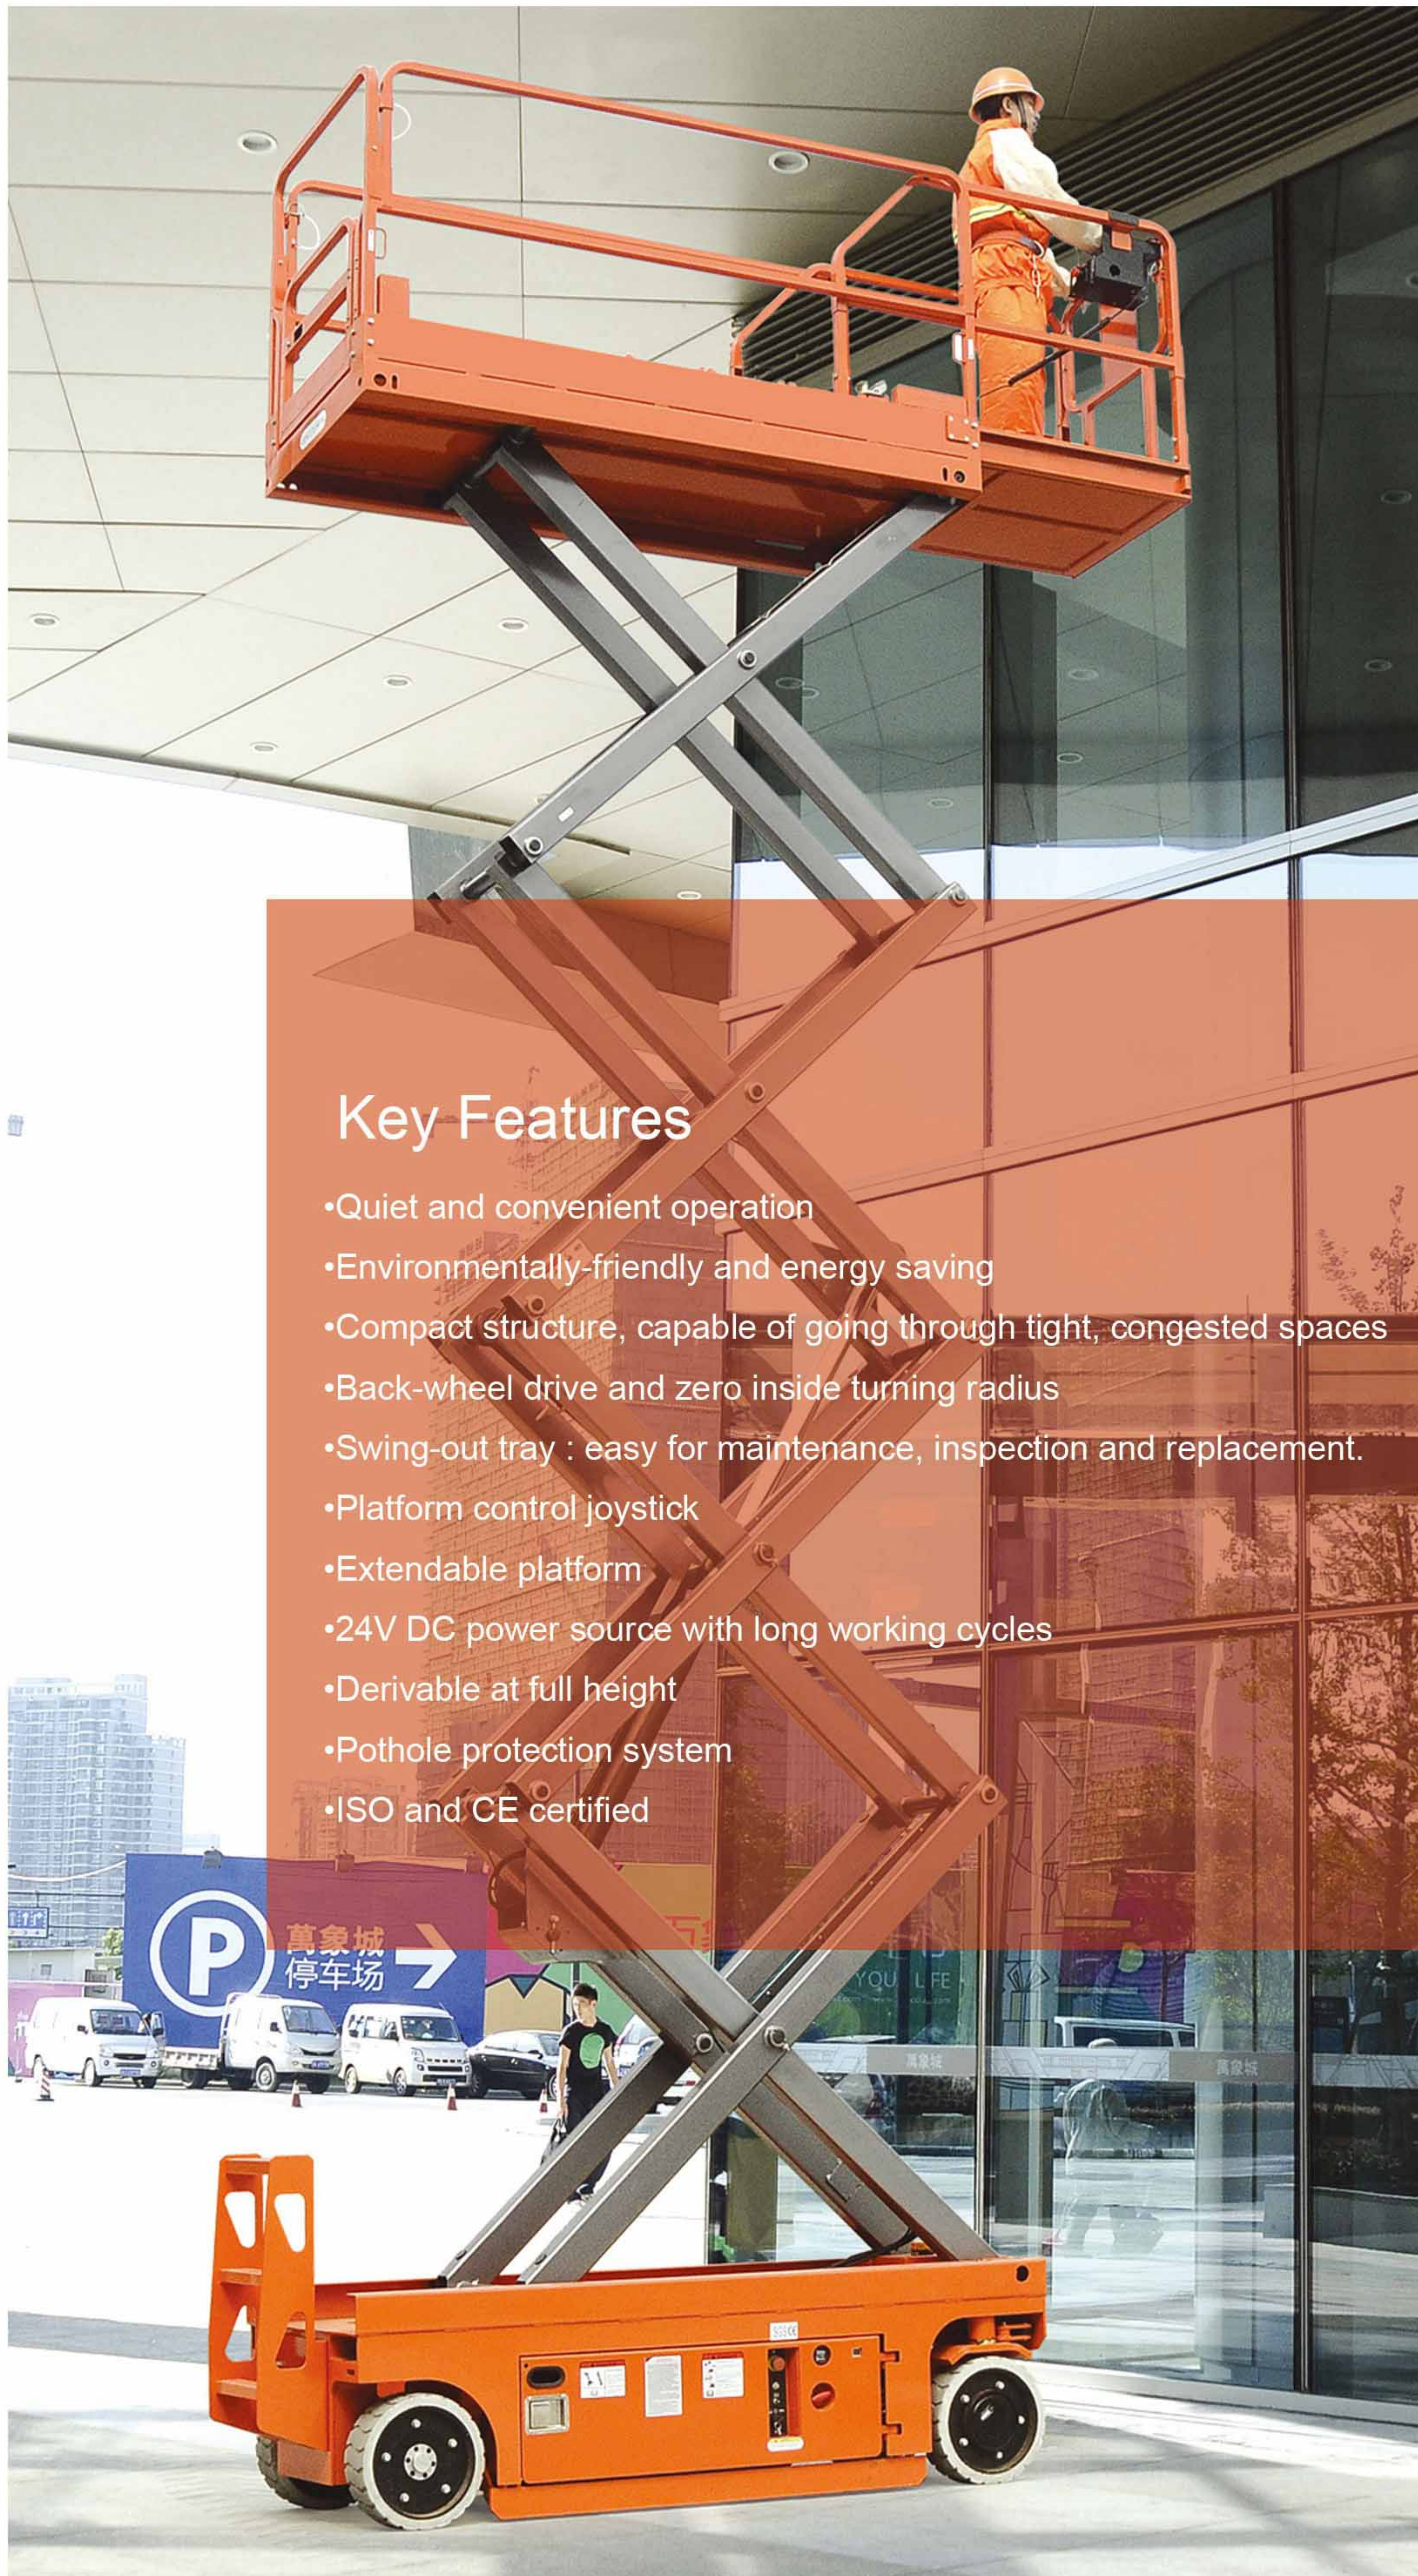


Key Features

- Quiet and convenient operation
- Environmentally-friendly and energy saving
- Compact structure, capable of going through tight, congested spaces
- Back-wheel drive and zero inside turning radius
- Swing-out tray : easy for maintenance, inspection and replacement.
- Platform control joystick
- Extendable platform
- 24V DC power source with long working cycles
- Derivable at full height
- Pothole protection system
- ISO and CE certified



SPECIFICATIONS

Specification	Unit	GTJZ04C	GTJZ06C	GTJZ08C
Platform capacity	Kg	300	300	300
Extendable platform capacity	Kg	113	113	113
Max. working height (H2)	m	6	8	10
Max. platform height (H1)	m	4	6	8
Length(L)	mm	2350	2350	2350
Width(W)	mm	1450	1450	1450
Height (guardrail up)	mm	2350	2450	2550
Height (guardrail down)	mm	2025	2125	2225
Size of platform	mm	2040x930	2040x930	2040x930
Extendable platform	mm	900	900	900
Min. Ground clearance (scissor folded)	mm	170	170	170
Min. Turning radius (inner wheels)	mm	0	0	0
Lifting motor	V/Kw	48/1.6	48/1.6	48/1.6
Travel speed	Km/h	3	3	3
Rising/decline speed	Mm/sec	3-5	3-5	3-5
Battery	V/Ah	4x12/150	4x12/150	4x12/150
Charger	V/A	48/25	48/25	48/25
Grade ability	%	30	30	30
Max. working inclination	°	2 - 3	2 - 3	2 - 3
Overall weight	Kg	1600	1700	1850

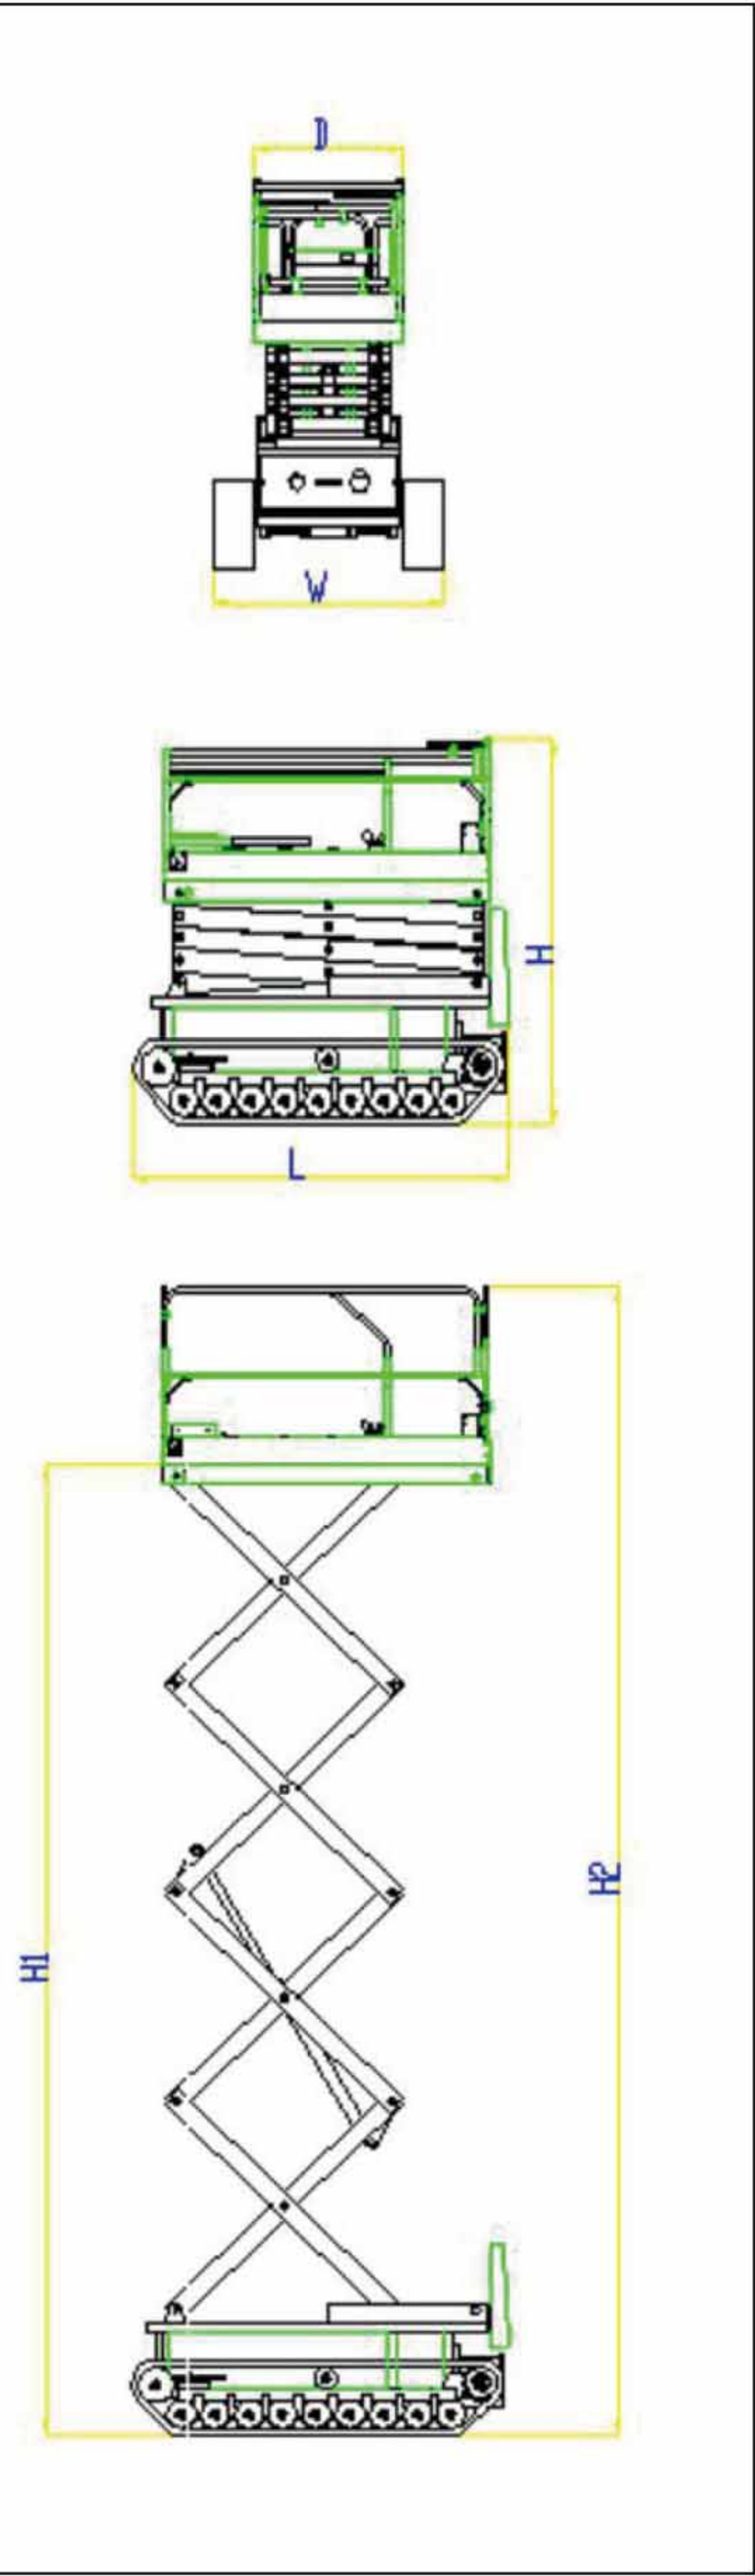

Crawler Belt



Maintenance Support



Emergency Stop



Tilting Sensor



KEY FEATURES

- Rough-terrain capability
- Platform control and remote control optional
- 6-10m working height
- 320kg load capacity
- 48V power source with long working cycles
- Zero inside turning radius
- Derivable and functional at full height
- Outriggers (optional)
- Emergency stop at both platform and ground controls
- Proportional controls for drive functions
- Load, size and height customizable
- ISO and CE certified



SPECIFICATIONS

Model	Platform size (m)	Load (kg)	Platform height (m)	Working height (m)	Overall size (m)	Motor (kw)	weight (kg)
SJY0.5-6	2.10*0.93	500	6	8	2.26*1.14*1.36	1.1	880
SJY0.5-8	2.10*0.93	500	8	10	2.26*1.14*1.46	1.5	1050
SJY0.5-10	2.10*1.23	500	10	12	2.26*1.44*1.61	2.2	1360
SJY0.5-12	2.60*1.50	500	12	14	2.80*1.71*1.85	3	2260
SJY0.5-14	2.81*1.50	500	14	16	3.03*1.77*1.91	3	2400
SJY0.5-16	2.81*1.60	500	16	18	3.03*1.82*2.12	3	3500
SJY0.5-18	3.07*1.60	500	18	20	3.29*1.82*2.122	3	3900
SJY1.0-6	2.10*1.23	1000	6	8	2.26*1.48*1.46	3	1400
SJY1.0-8	2.10*1.23	1000	8	10	2.26*1.48*1.50	3	1585
SJY1.0-10	2.10*1.23	1000	10	12	2.26*1.48*1.61	3	1700
SJY1.0-12	2.60*1.50	1000	12	14	2.80*1.74*1.85	3	2560
SJY1.0-14	2.81*1.50	1000	14	16	3.07*1.80*1.91	3	2765



控制手柄




限位器



安全护栏



牵引杆

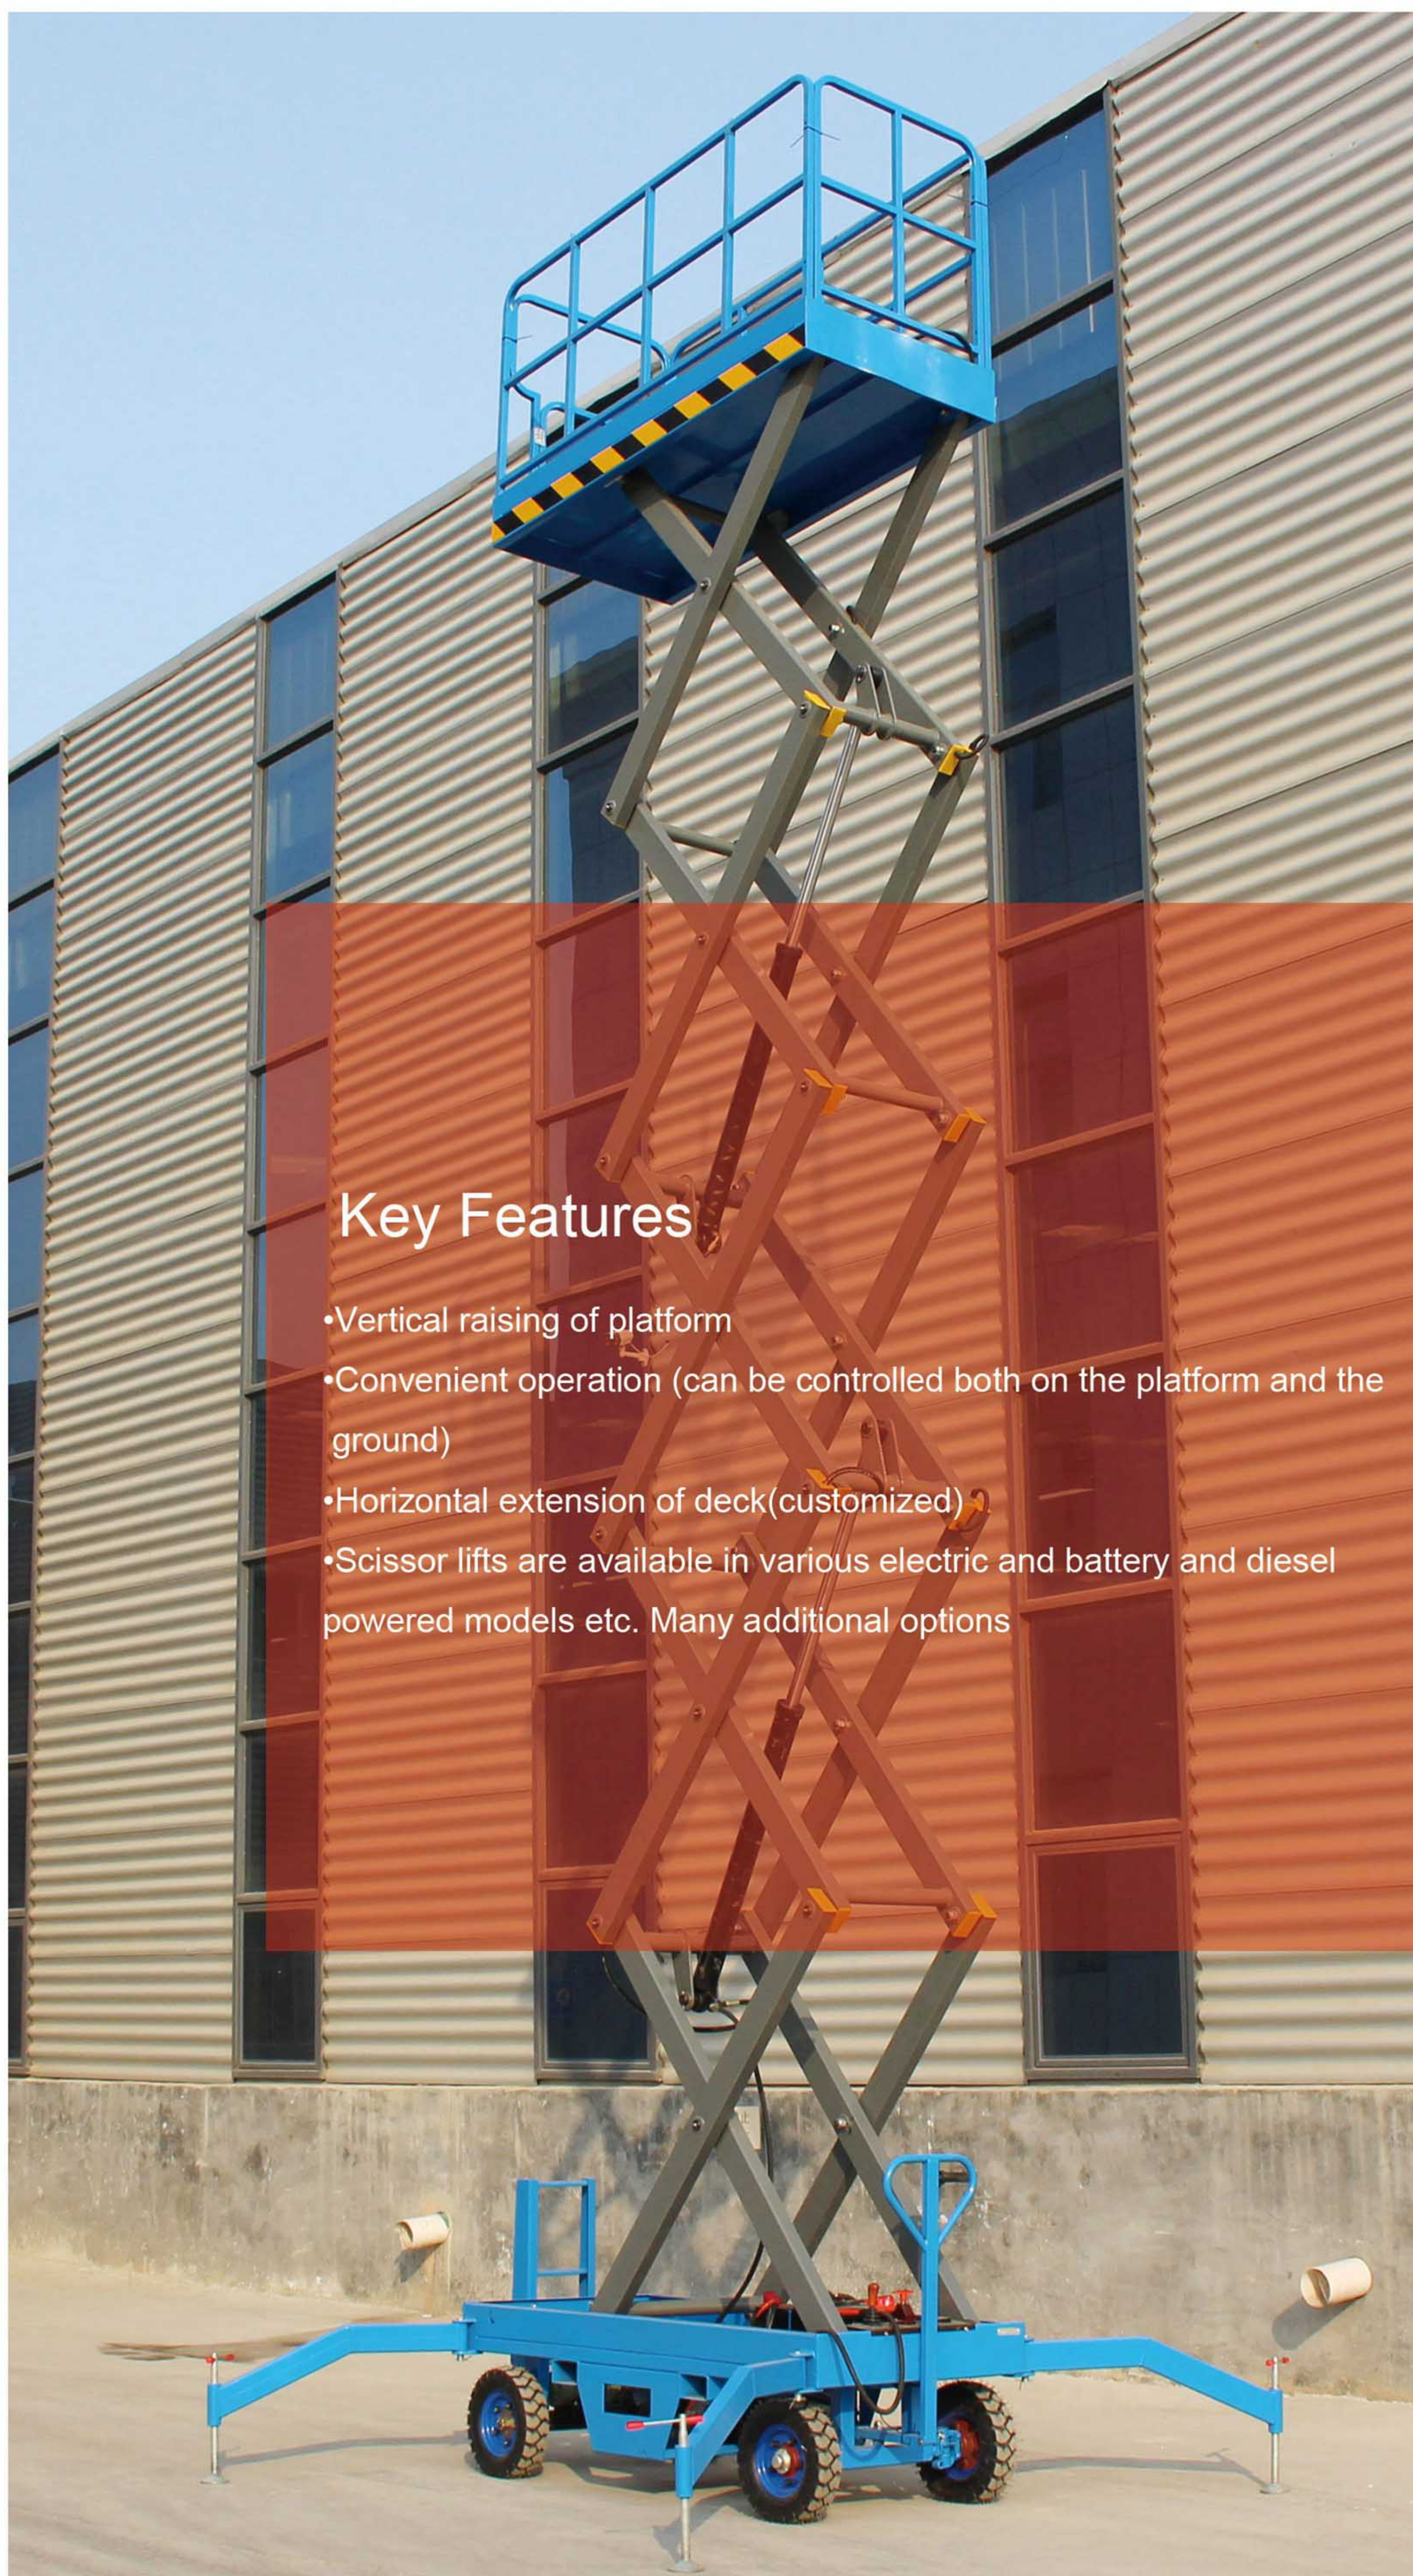

Key Features

- Vertical raising of platform
- Convenient operation (can be controlled both on the platform and the ground)
- Horizontal extension of deck(customized)
- Scissor lifts are available in various electric and battery and diesel powered models etc. Many additional options